


Code : YA-LS-10K-R140-D

Product : LINEAR SPOT 10W

LINEAR SPOT

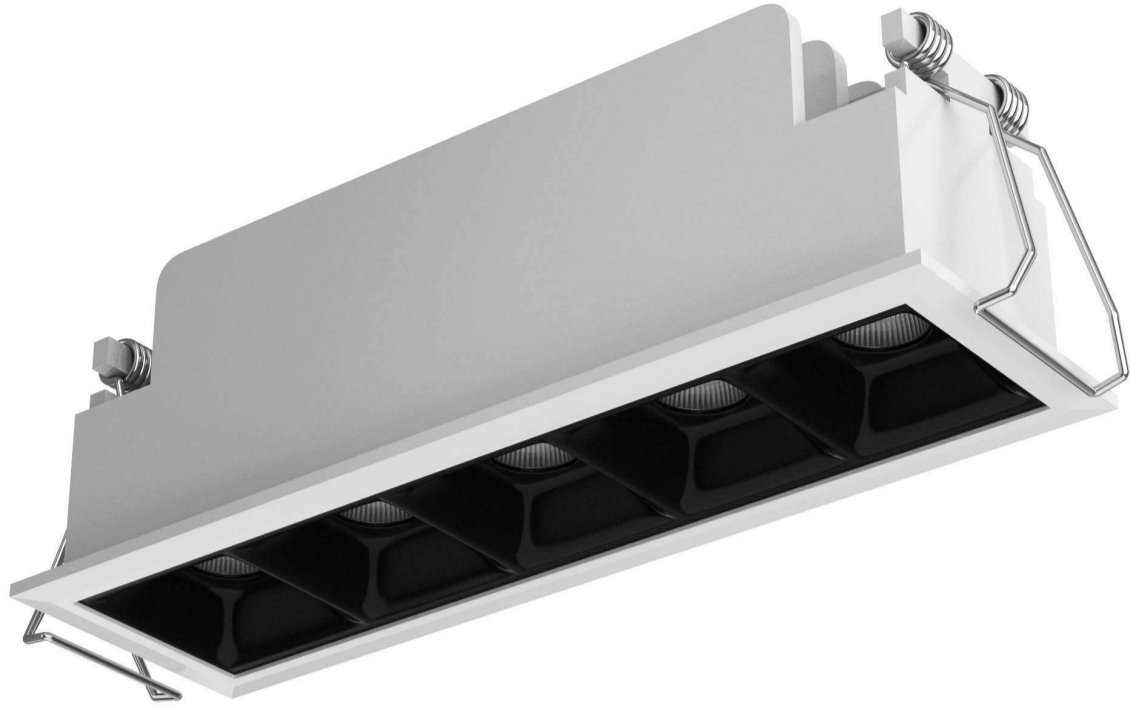


- Precise light distribution with special configuration of optical system.
- Low UGR gives high visual comfort.
- Precise speckle with four kinds of beam angles : 10°/15°/30°/45°.
- Recessed miniaturised luminaire provides between size and light beam.
- Linear lighting fixture with perfect anti glare light distribution.
- Eccentric design makes precise speckle via reducing stray light.
- Radiant forging surface in die cast aluminum gives high heat efficiency.




TECHNICAL DATA :

<p>High Efficiency 70-100lm/w</p>	<p>Power 10W</p>	<p>CCT 2700K/3000K/4000K/6000K</p>
<p>LED Source Osram LED</p>	<p>CRI RA>90</p>	<p>High Lumens 700-750lm</p>
<p>Input Details 550mA / 8-20 VDC</p>	<p>Beam Angle 10°/ 15°/ 30°/45°</p>	<p>Dimming Option SW/TD/DA</p>
<p>IP Rating IP20</p>	<p>Size H49*L147,CO-140*37mm</p>	<p>Weight 483gm ±10%</p>
<p>MacAdam 3 Step</p>	<p>Finish White, Black</p>	<p>Refractor Lens White, Black</p>
<p>Temperature-Ambient Upto 40°C</p>	<p>Installation Recessed</p>	<p>Long Life Time 50,000 hrs</p>


DIMENSIONS :

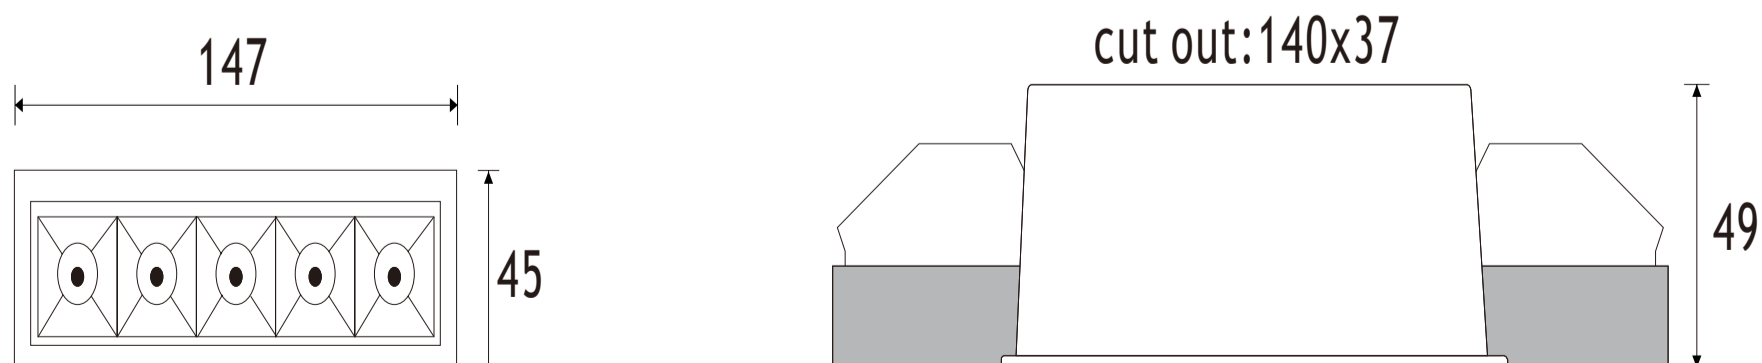


PHOTOMETRICS:

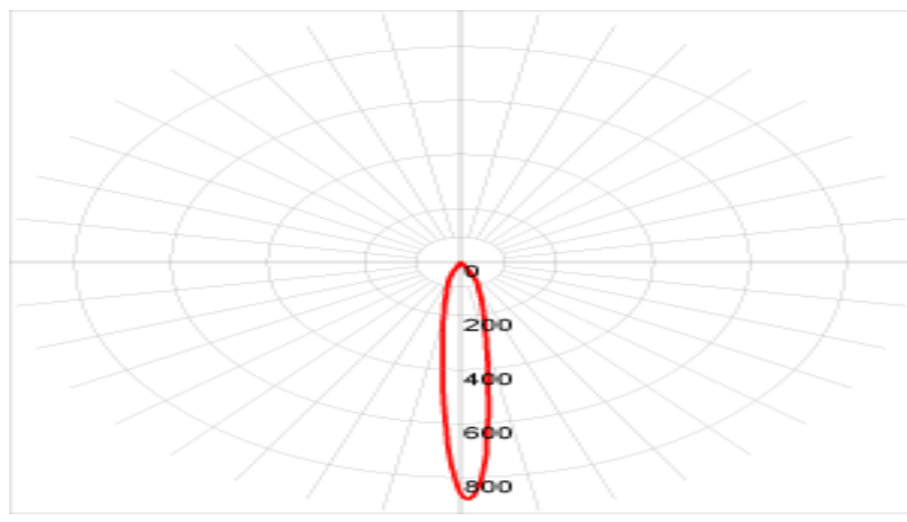


10W, 10D

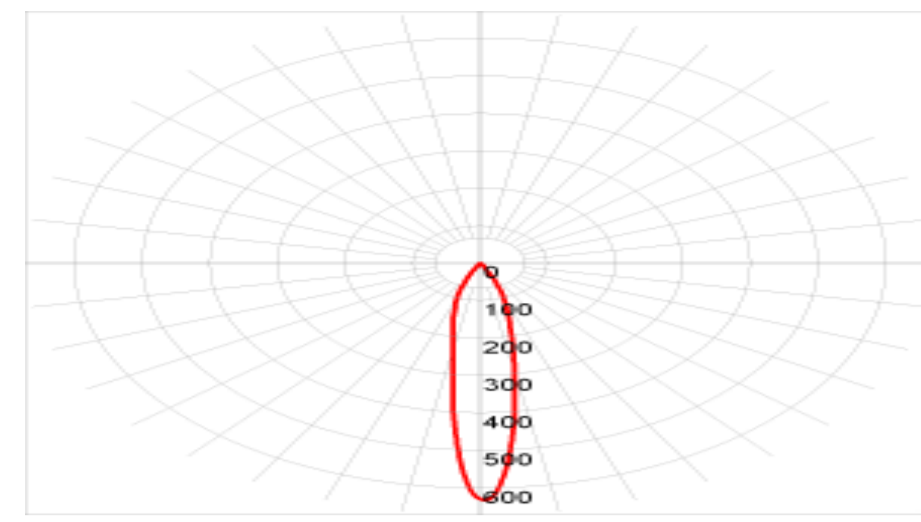

10W, 15D

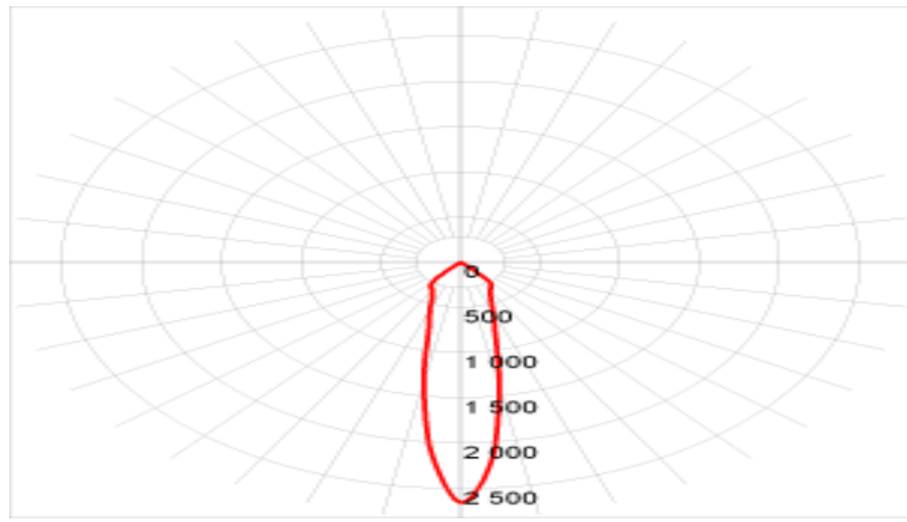

10W, 30D

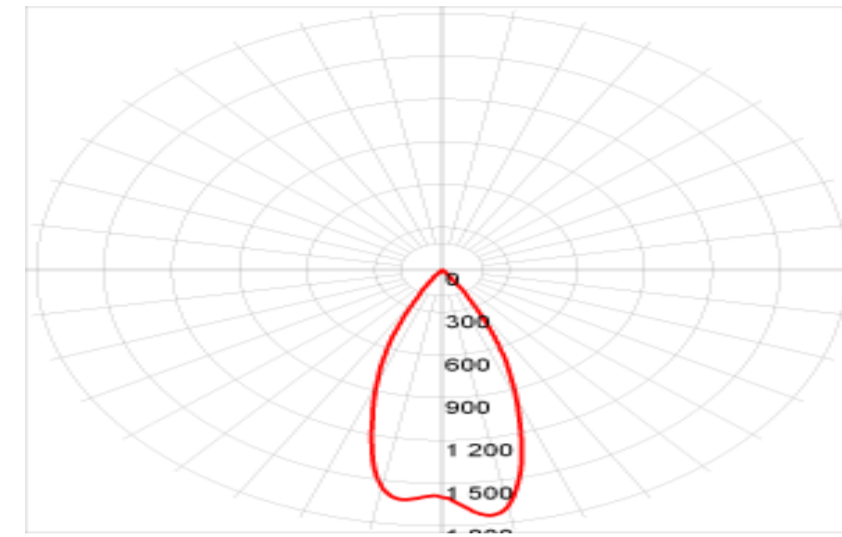


10W, 45D


ORDER INFORMATION :

 **Series**
Linear Spot- LS

 **Wattage**
W- 2, 4, 10, 20, 30

 **CCT**
K- 3000, 4000, 6000

 **Mount**
R- Recessed

 **Beam Angle**
B- 10°/ 15°/ 30°/45°

 **Finish Colours**
White, Black

FRAMES :



White



Black